

CASH CENTER SYSTEMS

VERIFYING EQUIPMENT

Safety at your service


Sometimes you need that extra verification after handling your coins. A check weigher system is an easy solution to make sure your packages contain what they should, and also mark them properly.

FEATURES

- For large volumes of coins
- Verified by customers world wide
- Easy integration with our other central cash equipment
- Automatically verifies coin packages

CHECKWEIGHER FOR SACHETS SC-98600

Checkweighing system for sachets. Not accepted (outside the set limits) sachets are automatically rejected by means of a pneumatic cylinder. Handles sachets with width 120 mm (4.72") and length up to 150 mm (5.91"). Available in one-, two-, three- or four-line configuration.

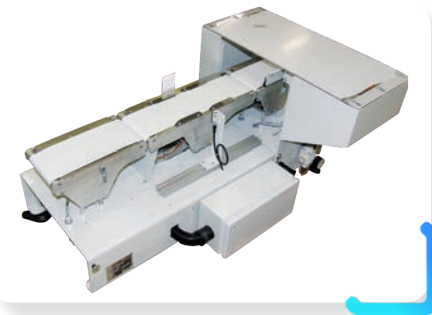


TECHNICAL SPECIFICATION

CAPACITY	75 weighing per minute
ACCURACY	±1 g Depending on product and speed
HEIGHT	520 MM (0.47")
LENGTH	1,000 mm (39.37")
DEPTH	802 mm (31.58")
WEIGHT	50 kg (110.2 lb)
AIR CONNECTION	6 Bars
POWER SUPPLY	230 V /50 Hz

CHECKWEIGHER FOR COIN ROLLS SC-94250

Checkweighing system for sachets. Not accepted (outside the set limits) sachets are automatically rejected by means of a pneumatic cylinder. Handles sachets with width 120 mm (4.72") and length up to 150 mm (5.91"). Available in one-, two-, three- or four-line configuration.

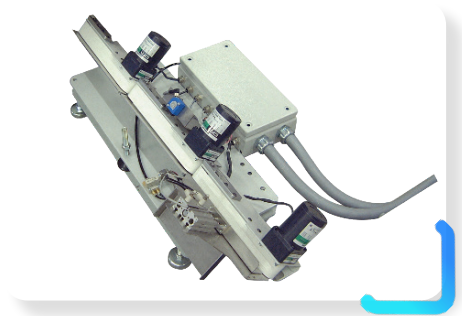

TECHNICAL SPECIFICATION	
CAPACITY	Max 500 g and 40 rolls/min.
ACCURACY	±1 g Depending on product and speed
HEIGHT	400 MM (15.75")
LENGTH	870 mm (34.25")
DEPTH	300 mm (11.81")
WEIGHT	45 kg (99.2 lb)
AIR CONNECTION	7 Bars
POWER SUPPLY	230 V /50 Hz

CHECKWEIGHER/LABELLER SC-98400

Checkweighing and labelling system for coin bags or coin roll packages. Automatic reject of not accepted packages by means of a pneumatic cylinder. Scale indicator with memory for 100 products. The label printer and applicator can handle both thermo transfer and direct thermo.



TECHNICAL SPECIFICATION	
CAPACITY	Max 10 kg/package and 18 packages/min.
ACCURACY	±5 g Depending on product and speed
HEIGHT	1,520 MM (59.44")
LENGTH	1,500 mm (59.06")
DEPTH	957 mm (7.68")
WEIGHT	100 kg (200.5 lb)
AIR CONNECTION	6 Bars
POWER SUPPLY	230 V /50 Hz