

Checkweighers

Verifying Equipment

Safety at your service




Checkweighers are sorting systems for rolled coin, allowing cash centers to process rolled coin from almost any coin-roll wrapping system. PayComplete checkweighers work with multiple systems, increasing efficiency in cash center coin processing and packaging.

Features

- For large volumes of coins
- Easy integration with our other central cash equipment
- Automatically verifies coin packages
- Verified by customers world wide

Checkweigher for Sachets SC-98600

Checkweighing system for sachets. Unacceptable (outside the set limits) sachets are automatically rejected by means of a pneumatic cylinder. Handles sachets with width 120 mm (4.72") and length up to 150 mm (5.91"). Available in one-, two-, three- or four-line configuration.

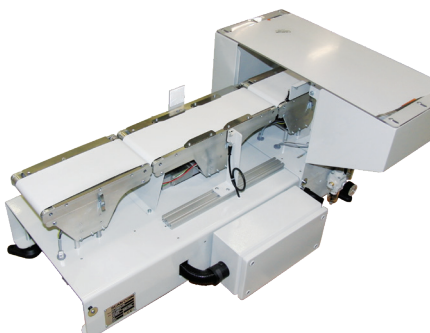


Specifications	SC-98600 Sachets
CAPACITY	75 weighing per minute
ACCURACY	±1 g Depending on product and speed
HEIGHT	520 mm (20.47")
LENGTH	1,000 mm (39.37")
DEPTH	802 mm (31.58")
WEIGHT	50 kg (110.2 lb)
AIR CONNECTION	6 Bars
POWER SUPPLY	230 V /50 Hz

Check Weigher for Coin Rolls SC-94250

Check weighing system for coin rolls. Collects the coin roll directly after the wrapping machine. Not accepted (outside the set limits) coin rolls are automatically rejected by means of a pneumatic cylinder. Handles all common coin roll sizes.

Available in one-, two-, three- or four-line configuration.

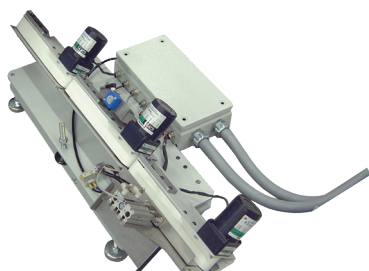

Specifications	SC-94250
CAPACITY	Max 500 g and 40 rolls/min.
ACCURACY	±1 g Depending on product and speed
HEIGHT	400 MM (15.75")
LENGTH	870 mm (34.25")
DEPTH	300 mm (11.81")
WEIGHT	45 kg (99.2 lb)
AIR CONNECTION	7 Bars
POWER SUPPLY	230 V /50 Hz

Checkweigher/Labeller SC-98400

Checkweighing and labelling system for coin bags or coin roll packages.

Automatic rejection of unacceptable packages by means of a pneumatic cylinder. Scale indicator with memory for 100 products. The label printer and applicator can handle both thermo transfer and direct thermo.



Specifications	SC-98400
CAPACITY	Max 10 kg/package and 18 packages/min.
ACCURACY	±5 g Depending on product and speed
HEIGHT	1,520 MM (59.44")
LENGTH	1,500 mm (59.06")
DEPTH	957 mm (7.68")
WEIGHT	100 kg (200.5 lb)
AIR CONNECTION	6 Bars
POWER SUPPLY	230 V /50 Hz